



HEATING AND COOLING SOLUTIONS

SPLIT SYSTEMS



AUSTRALIA'S BEST AIR CONDITIONER BRAND

We're proud to have been recognised by CHOICE® as Australia's best brand of air conditioner for the third year in a row - something no other air conditioner brand has done before. The award is based on test reviews of over 200 reverse cycle air conditioners and the results of the annual reliability and satisfaction survey completed by CHOICE® members.

AUSTRALIA'S MOST SATISFIED CUSTOMERS

We're also proud to have been named by Canstar Blue as having the most satisfied customers of any air conditioner brand in Australia. Canstar Blue's annual air conditioner review rates air conditioning brands on functionality and features, noise, ease of use, reliability, value for money and overall consumer satisfaction.

MITSUBISHI HEAVY INDUSTRIES AIR CONDITIONERS AUSTRALIA

Mitsubishi Heavy Industries Air-Conditioners Australia (MHIAA) is one of Australia's leading suppliers of premium residential and commercial air conditioning systems. Delivering engineering excellence for over 130 years, the Mitsubishi Heavy Industries brand is instantly recognisable for quality and technological advancement. With innovation central to both the organisation and the development of air conditioning systems, Mitsubishi Heavy Industries carries a strong philosophy of engineering products that are designed to improve the lives of those who use them and, at the same time, create a sustainable future for our company and the world we live in.

BRAND AMBASSADOR TARA DENNIS

Interior designer and Television presenter Tara Dennis joins Mitsubishi Heavy Industries Air-Conditioners Australia as the brand's first ambassador to Australia and New Zealand. With extensive experience in home decoration and design, Tara represents the home renovator looking to improve the design of their homes. "As someone who has a passion for styling and renovating you want to push the boundaries and create a space that people love being in. Mitsubishi Heavy Industries Air conditioners Australia is the perfect extension of this and a brand that I am proud to be supporting"



Tara Dennis

COMMITTED TO QUALITY

Standing behind the quality of our products, is our commitment to our customers and our after sales service guarantees. Along with the rigorous quality assurance testing carried out on all Mitsubishi Heavy Industries products, comprehensive warranties provide you with peace of mind and carry our commitment to quality.

5 YEARS PARTS AND LABOUR WARRANTY

Mitsubishi Heavy Industries Air conditioners Australia focuses solely on manufacturing high performance air conditioners for the Australian market. All our systems are of the highest quality and are backed by a full 5 year parts and labour warranty.



EXCEEDING ENERGY PERFORMANCE STANDARDS

To comply with Australian standards and deliver the most efficient solutions possible to our customers, all Mitsubishi Heavy Industries Air conditioners Australia systems meet and exceed the Minimum Energy Performance Standards (MEPS).



MHIAA Split Systems

Our award winning split systems offer a quiet and highly energy efficient solution for heating and cooling individual rooms. They are comprised of an indoor unit which is installed on an interior wall or in your ceiling and an outdoor unit which is placed on an exterior wall of your home. All split systems come with a wireless remote control as standard.

Our split systems come in a variety of types (wall mounted, floor mounted and bulkhead), a range of capacities and both cool only and reverse cycle to suit any Aussie home.

All our systems have undergone strict and rigorous testing and quality control measures to ensure they are of the highest standards and will withstand the tough Australian climate.



Wall Mounted

- Highly energy efficient
- Convenient features and functions
- Available in range of capacities
- Suitable for any home



Floor Mounted

- Energy efficient
- Convenient features and functions
- Perfect for colder climates



Bulkhead

- Super quiet operation
- Discreet design
- Perfect for renovations, new builds
- Convenient features and functions

Our Technology

IMPROVED HEAT EXCHANGER


Our new and improved heat exchanger has been developed to improve refrigerant distribution and increase the systems effectiveness. The new design features a larger heat exchange area, boosting the unit's overall efficiency.

COATED PCB

To protect against humid weather a protective coating is applied to the circuit board in the outdoor unit, allowing it to withstand Australia's varying weather conditions and ensure the longevity of your system.

BLUE FIN TECHNOLOGY

Mitsubishi Heavy Industries outdoor units are coated with specially formulated layers that assist in preventing the hydrophilicity effect and assists in reducing the corrosion rate of the aluminium section from harsh Australian weather conditions.

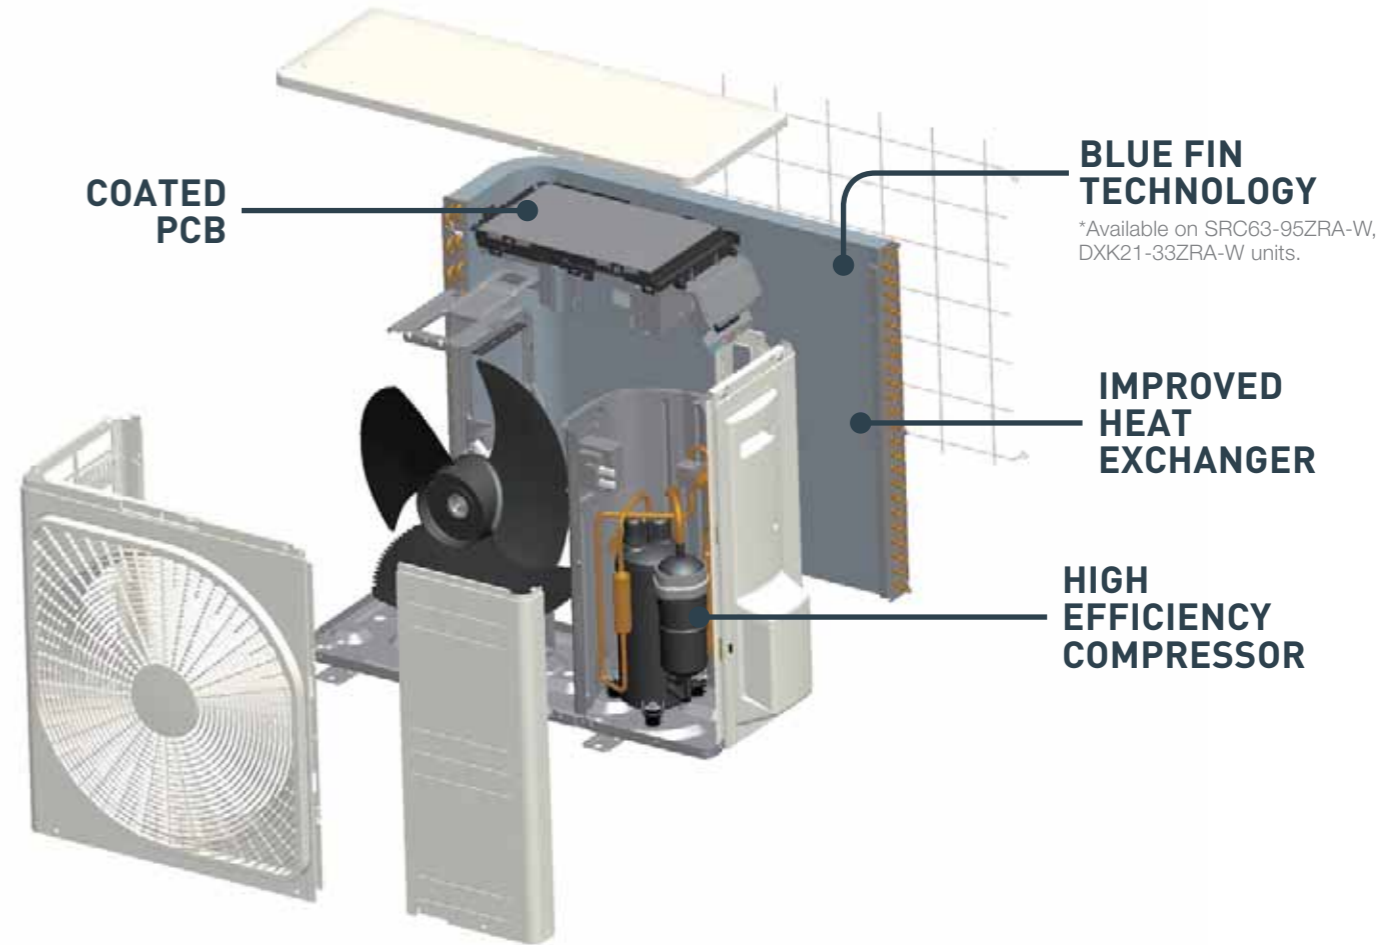

HIGH EFFICIENCY COMPRESSOR

One of the key features that provides Mitsubishi Heavy Industries air conditioners with their powerful performance is our highly efficient compressor. Combined with a Neodymium motor that uses powerful, rare earth magnets, Mitsubishi Heavy Industries air conditioners can deliver a higher motor efficiency while producing much less operational noise.

DC PAM INVERTER

The PAM control used in Mitsubishi Heavy Industries air conditioners helps minimise the loss of electricity and boost the efficiency by allowing the unit to reach the temperature quickly before slowing down the compressor. This allows the unit to save energy while maintaining a comfortable temperature in the room.

WIDE OPERATION RANGE

With our advanced technology and high quality components, Mitsubishi Heavy Industries air conditioners can operate in ambient outdoor temperatures as low as -20°C in heating mode and as high as +46°C in cooling mode. This permits the installation in areas where the temperature conditions can be considered extreme.

Key Features and Functions


Our split systems come with a number of key convenient features and functions that are designed to ensure your comfort all year round. See page 16 for a full list of all features and functions.



CLEAN AIR TECHNOLOGY

Removes airborne allergens such as pollen and dust by capturing them in a specially formulated Allergen Clear Filter and neutralising them via the multi-stage Allergen Clear Operation.

A photocatalytic filter captures remaining particles and neutralises odour causing bacteria before the Self Cleaning Mode dries the internal anti-microbial fan and internal components, inhibiting the growth of mould and ensuring fresh air on every start-up*

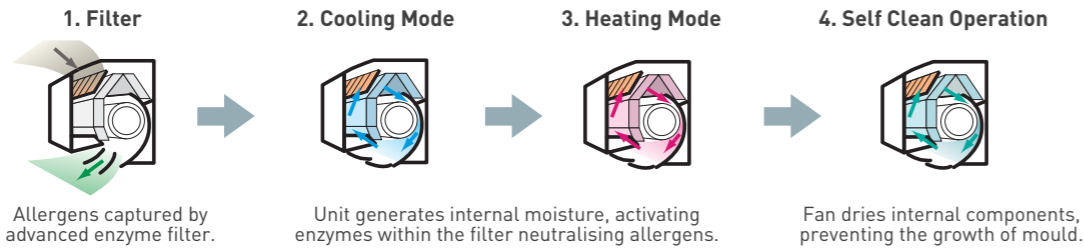

HIGH POWER OPERATION

Provides 15mins of boosted power allowing you to quickly heat or cool your home before returning to normal operation. Perfect for when you first turn on the unit.



JET AIR TECHNOLOGY

Utilising CFD (Computational Fluid Dynamics), used by jet engine manufacturers, our engineers have been able to improve and optimise the design the internal fan blades, allowing our split systems to deliver the most powerful yet efficient airflow possible.



3D AUTO MODE

Activates three independent motors which deliver an effective and efficient airflow throughout the room.



LED BRIGHTNESS ADJUSTMENT

Adjust the brightness of the LED display on the indoor unit to minimise disturbance and ensure a good nights sleep.



WEEKLY TIMER

Set up to 4 timer operations a day (max 28 per week). Once set, the unit will turn on and off at the specified times of the day repeatedly

Air Conditioning Sizing Chart

A Class

Insulated roof space, walls and sub floor, full brick or brick veneer construction, average size windows with awnings, full shading south facing aspect, temperate weather conditions.

B Class

Insulated roof space, full brick or brick veneer construction, average size windows with internal shades, north facing aspect, temperate climate.

C Class

Insulated roof space, full brick or brick veneer construction, average size windows with internal shades, east facing aspect or sub tropical climate.


D Class

Little or no insulation, weatherboard, fibro or brick veneer construction, large windows, no shading from the sun westerly facing aspect.

Selection Chart for Cooling and Heating			Room Class			
Model	Capacity		A	B	C	D
			Maximum Floor Area (m ²)			
SRK17ZMP-S	1.7kW	Cooling	17	14	12	10
		Heating	20	17	15	12
Avanti PLUS® (SRK20ZSXA-W) Avanti® (SRK20ZSA-W / DXK06ZSA-W)	2.0kW	Cooling	20	16	14	12
		Heating	27	23	20	16
Avanti® Cool Only (SRK10YSA-W)	2.5kW	Cooling	25	21	18	15
Avanti PLUS® (SRK25ZSXA-W) Avanti® (SRK25ZSA-W / DXK09ZSA-W) Akari™ SRR-ZS (SRR25ZS-W) Wera™ SRF-ZS (SRF25ZS-W)	2.5kW	Cooling	25	21	18	15
		Heating	34	28	24	20
Avanti® Cool Only (SRK13YSA-W)	3.5kW	Cooling	35	29	25	21
Avanti PLUS® (SRK35ZSXA-W) Avanti® (SRK35ZSA-W / DXK12ZSA-W) Akari™ (SRR35ZS-W) Wera™ (SRF35ZS-W)	3.5kW	Cooling	35	29	25	21
		Heating	40	33	29	24
Avanti® Cool Only (SRK18YSA-W)	5.0kW	Cooling	51	43	36	30
Avanti PLUS® (SRK50ZSXA-W) Avanti® (SRK50ZSA-S / DXK18ZSA-W) Wera™ (SRF50ZSXA-W)	5.0kW	Cooling	51	43	36	30
		Heating	58	48	41	34
Avanti PLUS® (SRK60ZSXA-W)	6.0kW	Cooling	60	50	45	37
		Heating	68	57	48	39
Bronte® (SRK63ZRA-W / DXK21ZRA-W)	6.3kW	Cooling	63	54	47	38
		Heating	71	58	50	42
Bronte® Cool Only (SRK24YRA-W)	7.1kW	Cooling	71	59	51	42
		Heating	80	67	57	47
Bronte® (SRK71ZRA-W / DXK24ZRA-W)	7.1kW	Cooling	71	59	51	42
		Heating	80	67	57	47
Bronte® (SRK80ZRA-W / DXK28ZRA-W)	8.0kW	Cooling	80	67	57	47
		Heating	89	73	64	52
Bronte® (SRK95ZRA-W / DXK33ZRA-W)	9.5kW	Cooling	95	78	68	57
		Heating	105	87	76	60

* This guide has been developed to assist in model selection for the majority of normal residential air conditioning situations, and as per AS/NZS 3823 performance data. MHIAA recommend a heat load survey should be conducted by a licensed air conditioning installer. For R32 systems, minimum installation area for indoor unit and other AU/NZS Standards apply. Products are to be installed by a licensed and qualified person only.

SRK-ZMP Series

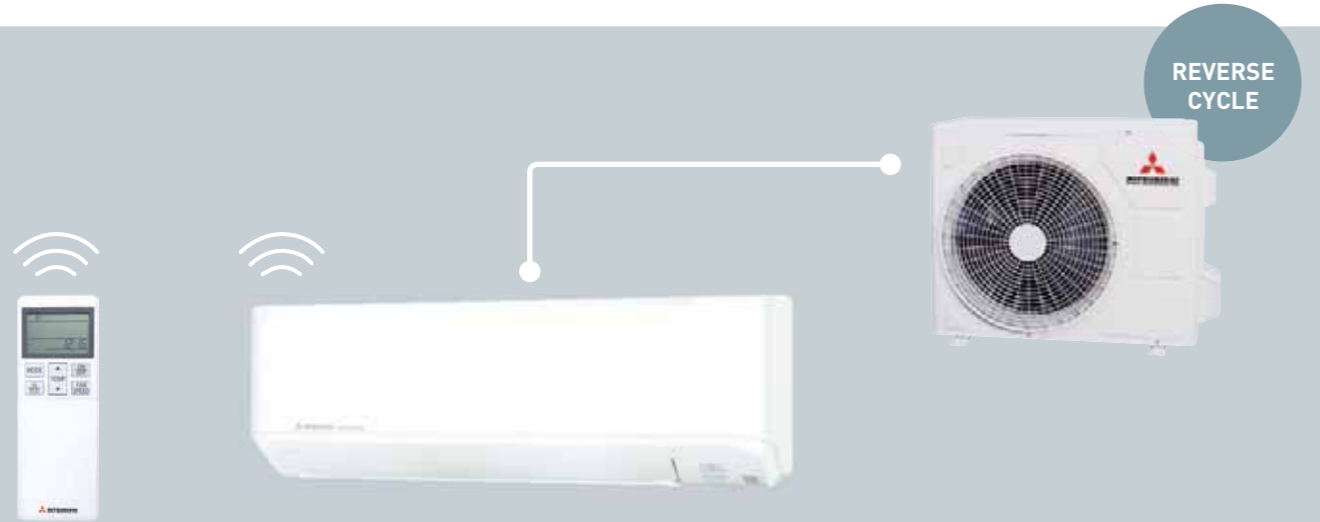

See pg. 16-17 for full list of features and functions

Wall Mounted 1.7kW

Designed for today's apartment living, the SRK-ZMP series combines a sleek and compact design with increased energy efficiency. Its 1.7kW capacity and compact design makes it perfect for small spaces such as spare bedrooms or home offices.

- HIGH POWER OPERATION**
Provides 15mins of boosted power allowing you to quickly heat or cool your home before returning to normal operation.
- COMPACT SIZE**
Both indoor and outdoor unit are compact in size making them versatile and perfect for rooms where space is limited.
- SELF CLEAN OPERATION**
Dries the indoor unit components by running the fan on ultra-low mode, preventing the growth of mould.
- CLEAN AIR TECHNOLOGY**
Captures and neutralises fine smoke particles, allergens, odours, bacteria and viruses while also inhibiting growth of mould within the unit.

SRK-ZMP SERIES				1.7kW	
Cooling Capacity			kW	1.7	
Heating Capacity				2.0	
Star Energy Rating (GEMS 2019)	Hot	Cooling	Stars	★ ★ (1.5)	
		Heating		★ ★ ★ (3)	
	Average	Cooling		★ ★ (1.5)	
		Heating		★ ★ ★ (2.5)	
	Cold	Cooling		★ (1)	
		Heating		★ ★ ★ (2.5)	

AVANTI® Series



See pg. 16-17 for full list of features and functions

Wall Mounted 2.0kW | 2.5kW | 3.5kW | 5.0kW



Named by ProductReview as the best split system of 2021, the Avanti® split system features a sleek and stylish design and incorporates a range of convenient features and functions. Coming in both reverse cycle and cool only models, the Avanti® is best suited to small and medium spaces.


- HIGH POWER OPERATION**
Provides 15mins of boosted power allowing you to quickly heat or cool your home before returning to normal operation.
- 3D AUTO MODE**
Activates three independent motors which deliver an effective and efficient airflow throughout the room.
- LED BRIGHTNESS CONTROL**
Adjust the brightness of the LED display on the indoor unit to minimise disturbance and ensure a good nights sleep.
- CLEAN AIR TECHNOLOGY**
Captures and neutralises fine smoke particles, allergens, odours bacteria and viruses while also inhibiting growth of mould within the unit.

AVANTI SERIES				2.0kW	2.5kW	2.5kW (Cool Only)	3.5kW	3.5kW (Cool Only)	5.0kW	5.0kW (Cool Only)
Cooling Capacity			kW	2.0	2.5	2.5	3.5	3.5	5.0	5.0
Heating Capacity				2.7	3.2	N/A	3.7	N/A	5.8	N/A
Star Energy Rating (GEMS 2019)	Hot	Cooling	Stars	★★★★★ (4.5)	★★★★★ (4.5)	★★★★★ (4.5)	★★★★★ (4)	★★★★★ (4)	★★★★★ (3.5)	★★★★★ (3.5)
		Heating		★★★ (3.5)	★★★ (3.5)	N/A	★★★ (3.5)	N/A	★★★ (3.5)	N/A
	Average	Cooling		★★★★ (4)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3)	★★★★ (3)
		Heating		★★★ (3.5)	★★★ (3)	N/A	★★★ (3)	N/A	★★★ (2.5)	N/A
	Cold	Cooling		★★★★ (4)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3)	★★★★ (3)
		Heating		★★★ (3)	★★★ (3)	N/A	★★★ (2.5)	N/A	★★★ (2)	N/A

OTHER CONTROL OPTIONS (SOLD SEPARATELY)



AVANTI PLUS® Series

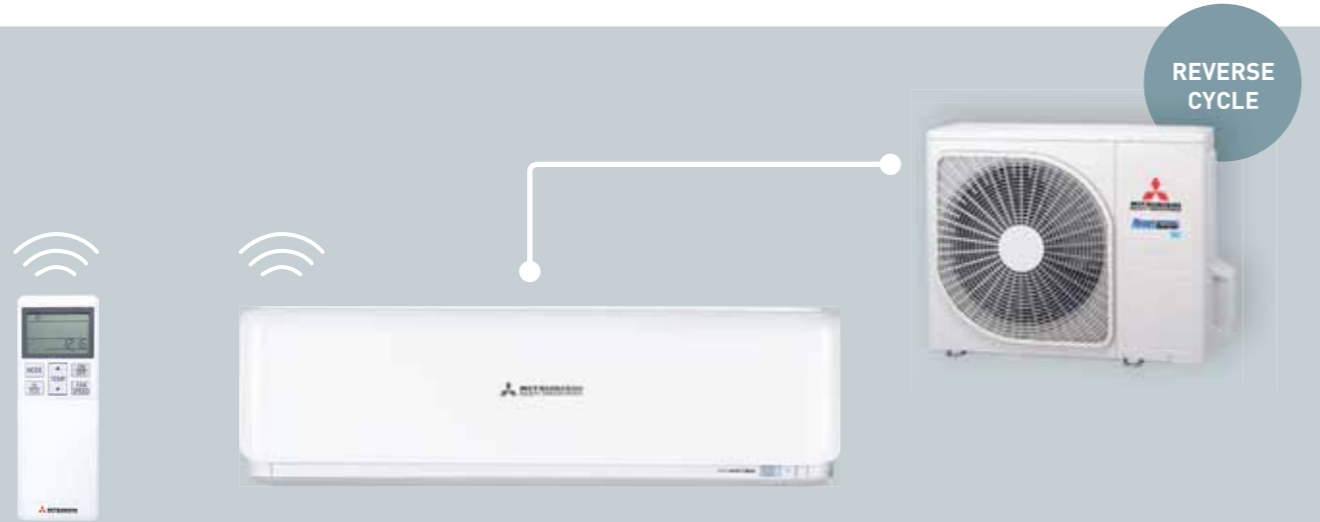

See pg. 16-17 for full list of features and functions

Wall Mounted 2.0kW | 2.5kW | 3.5kW | 5.0kW | 6.0kW



The Avanti PLUS® is one of the quietest and most energy efficient split systems available. It incorporates an energy saving motion sensor, improved automatic mode for precise temperature control and a range of other convenient features and functions. Available in reverse cycle, the Avanti PLUS® is perfect for small to medium spaces.

MOTION SENSOR
Automatically adjusts the set temperature based on human activity detected in the room. Switches the unit off when no activity is detected to save energy.

3D AUTO MODE
Activates three independent motors which deliver an effective and efficient airflow throughout the room.

SILENT OPERATION
Set periods of time where the unit will operate with even further reduced noise levels.


CLEAN AIR TECHNOLOGY
Captures and neutralises fine smoke particles, allergens, odours, bacteria and viruses while also inhibiting growth of mould within the unit.

AVANTI PLUS SERIES				2.0kW	2.5kW	3.5kW	5.0kW	6.0kW
Cooling Capacity			kW	2.0	2.5	3.5	5.0	6.0
Heating Capacity				2.7	3.2	4.3	6.0	6.8
Star Energy Rating (GEMS 2019)	Hot	Cooling	Stars	★★★★★ (5.5)	★★★★★ (5)	★★★★★ (5)	★★★★ (4)	★★★★ (3.5)
		Heating		★★★★★ (4.5)	★★★★★ (4.5)	★★★★★ (4)	★★★★ (3.5)	★★★★ (3.5)
	Average	Cooling		★★★★★ (4.5)	★★★★★ (4.5)	★★★★★ (4)	★★★★ (3.5)	★★★★ (3)
		Heating		★★★★★ (4)	★★★★★ (4)	★★★★★ (3.5)	★★★★ (3)	★★★★ (3)
	Cold	Cooling		★★★★★ (4.5)	★★★★★ (4.5)	★★★★★ (4.5)	★★★★ (3.5)	★★★★ (3.5)
		Heating		★★★★★ (3.5)	★★★★★ (3.5)	★★★★ (3)	★★★★ (2.5)	★★★★ (2.5)

OTHER CONTROL OPTIONS (SOLD SEPARATELY)



BRONTE® Series

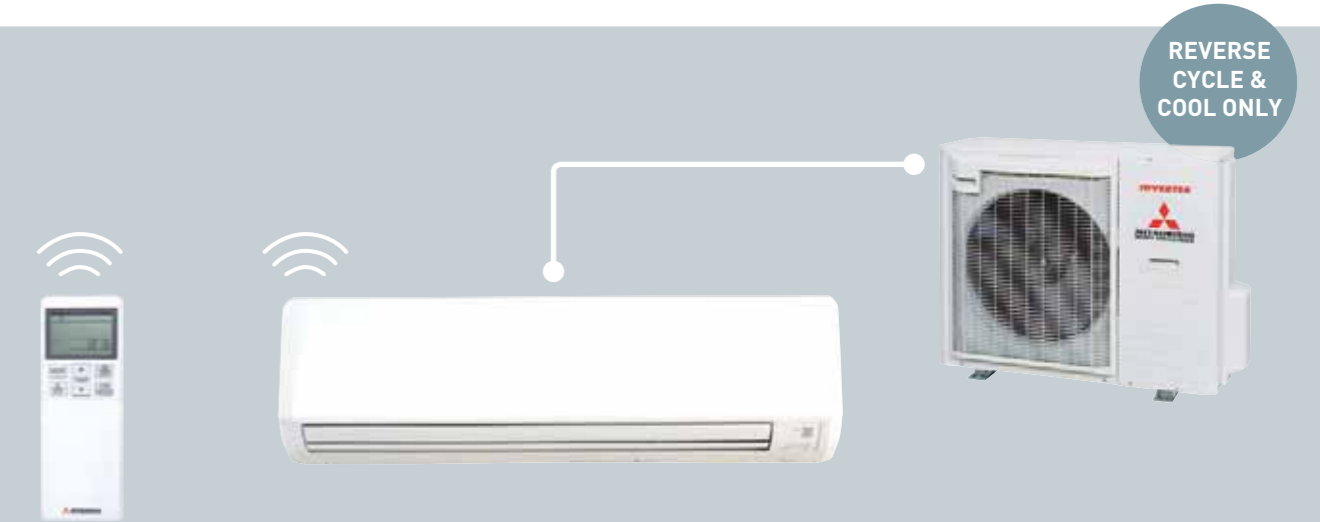

See pg. 16 -17 for full list of features and functions

Wall Mounted 6.3kW | 7.1kW | 8.0kW | 9.5kW



Named by ProductReview as the best split system of 2021, the Bronte® split system incorporates advanced fan blade technology to efficiently deliver an industry leading, long reach airflow of 18m*. Coming in both reverse cycle and cool only models, the Bronte® is best suited to medium to larger spaces.

HIGH POWER OPERATION
Provides 15mins of boosted power allowing you to quickly heat or cool your home before returning to normal operation.

JET AIR TECHNOLOGY
Advanced blade technology used in development of jet engines to deliver industry leading long reach airflow of 18m*

SILENT OPERATION
Set periods of time where the unit will operate with even further reduced noise levels.

CLEAN AIR TECHNOLOGY
Captures and neutralises fine smoke particles, allergens, odours, bacteria and viruses while also inhibiting growth of mould within the unit.

BRONTE SERIES				6.3kW	7.1kW	7.1kW (Cool Only)	8.0kW	9.5kW
Cooling Capacity			kW	6.3	7.1	7.1	8.0	9.5
Heating Capacity				7.1	8.0	N/A	9.0	10.3
Star Energy Rating (GEMS 2019)	Hot	Cooling	Stars	★★★★ (4)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)
		Heating		★★★ (3.5)	★★★ (3)	N/A	★★★ (3)	★★★ (3.5)
	Average	Cooling		★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3)	★★★★ (3)
		Heating		★★★ (3)	★★★ (2.5)	N/A	★★★ (2.5)	★★★ (2.5)
	Cold	Cooling		★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)
		Heating		★★★ (2.5)	★★ (2)	N/A	★★ (2)	★★ (2)


*7.1kW, 8.0kW and 9.5kW models in cooling mode
Outdoor unit shown is for SRC71-95ZRA-W

OTHER CONTROL OPTIONS (SOLD SEPARATELY)



WERA™ Series

AKARI™ Series

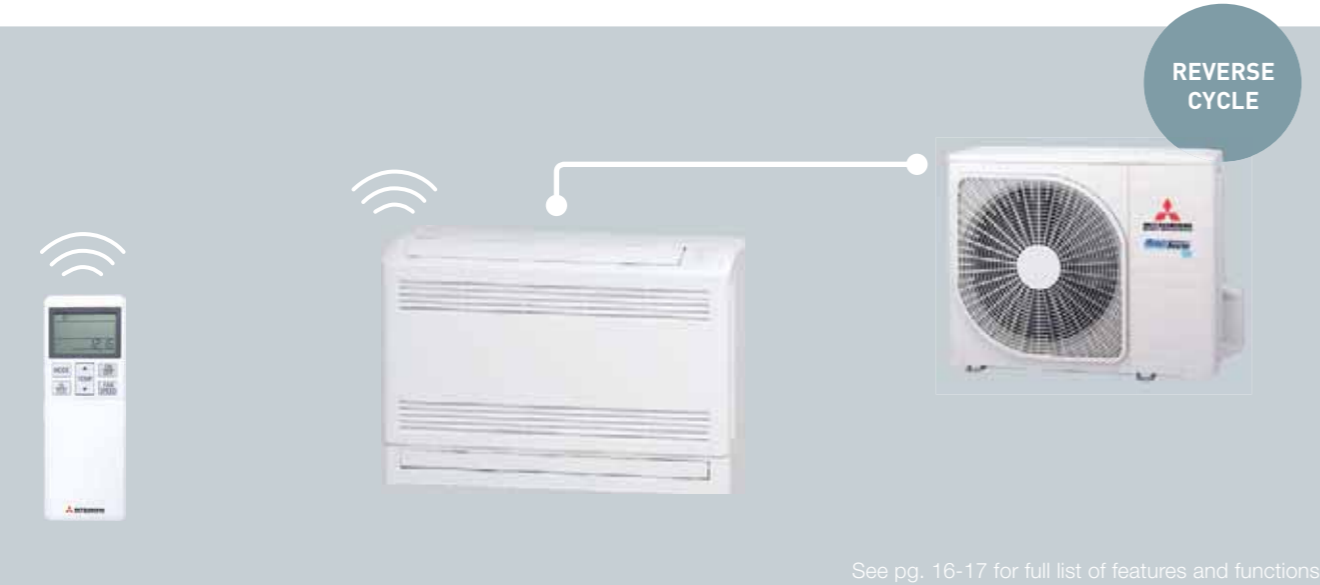

Floor Standing Systems 2.5kW | 3.5kW | 5.0kW

The Wera™ series of floor standing systems are the perfect solution when wall space is at a premium. The indoor unit is installed close to the floor and can be placed under a window, semi-recessed into the wall or mounted in a convenient location.

- HIGH POWER OPERATION**
Provides 15mins of boosted power allowing you to quickly heat or cool your home before returning to normal operation.
- MEMORY LOUVRE**
Set the louvre at the desired angle. The unit will automatically return the louvres to this position on every subsequent start up.
- SILENT OPERATION**
Set periods of time where the unit will operate with even further reduced noise levels.
- SELF CLEAN OPERATION**
Dries the indoor unit internal components, preventing the growth of mould.

WERA SERIES				2.5kW	3.5kW	5.0kW
Cooling Capacity			kW	2.5	3.5	5.0
Heating Capacity				3.4	4.5	6.0
Star Energy Rating (GEMS 2019)	Hot	Cooling	Stars	★★★★ (4)	★★★★ (4)	★★★★ (3.5)
		Heating		★★★ (3.5)	★★★ (3)	★★★ (3)
	Average	Cooling		★★★★ (3.5)	★★★★ (3.5)	★★★★ (3)
		Heating		★★★ (3)	★★★ (2.5)	★★★ (2.5)
	Cold	Cooling		★★★★ (3.5)	★★★★ (3.5)	★★★★ (3)
		Heating		★★★ (2.5)	★★ (2)	★★ (2)

OTHER CONTROL OPTIONS (SOLD SEPARATELY)



Bulkhead Systems 2.5kW | 3.5kW

The Akari™ series of low profile bulkhead systems are designed to sit within your ceiling space and distribute air via discreet grilles. These compact units require no ducting and are perfect for renovated spaces and applications such as apartments where space is at a premium.

- HIGH POWER OPERATION**
Provides 15mins of boosted power allowing you to quickly heat or cool your home before returning to normal operation.
- SUPER QUIET OPERATION**
The Akari series offers some of the quietest operation levels on the market achieving 24 dB(A) on low fan mode.
- SILENT OPERATION**
Set periods of time where the unit will operate with even further reduced noise levels.
- SELF CLEAN OPERATION**
Dries the indoor unit internal components, preventing the growth of mould.

AKARI SERIES				2.5kW	3.5kW
Cooling Capacity			kW	2.5	3.5
Heating Capacity				3.4	4.5
Star Energy Rating (GEMS 2019)	Hot	Cooling	Stars	★★★★ (4)	★★★★ (4)
		Heating		★★★ (3.5)	★★★ (3)
	Average	Cooling		★★★★ (3.5)	★★★★ (3.5)
		Heating		★★★ (3)	★★★ (2.5)
	Cold	Cooling		★★★★ (3.5)	★★★★ (3.5)
		Heating		★★★ (2.5)	★★ (2)

OTHER CONTROL OPTIONS (SOLD SEPARATELY)



Optional Control Solutions



RC-EXZ3A WIRED CONTROLLER

- Large, 3.8” backlit LCD touch screen with easy to navigate menu.
- Control the set temperature, operation mode and fan speed.
- Access timer and scheduling functions.
- Access additional features including Home Leave mode, Silent Mode, High Power mode plus more.
- Multi-language display (6 languages)

**Requires SC-BIKN2-E kit (sold separately) for use with wall mounted, bulkhead and floor standing systems. Not applicable to SRK-ZMP series.
***Function limitations may apply.



RC-E5 WIRED CONTROLLER

- LCD display.
- Control the set temperature, operation mode and fan speed.
- Access timer and scheduling functions.

**Requires SC-BIKN2-E kit (sold separately) for use with wall mounted, bulkhead and floor standing systems. Not applicable to SRK-ZMP series.
***Function limitations may apply.



WI-FI SOLUTION

- Control your system using your smart device (iPhone, iPad, Android) via the AC Cloud Control app or internet browser
- Control the set temperature, operation mode and fan speed remotely.
- Control your system using Voice Command via your Google or Amazon smart speaker device.
- Set up ‘favourite’ scenes and activate them with a single tap.
- Set your system to respond to the weather, you arriving home, calendar events + more**.
- Receive instant notifications and email updates and create usage logs**.

*Requires MH-AC-WIFI-1 Wi-Fi adaptor (sold separately) for use with split systems.
**In conjunction with IFTTT and other apps (must be downloaded separately).
Some additional functions may not be available via AC Cloud Control app.

AC Cloud Control



Compatible with

Amazon Alexa

Google Assistant

Apple Siri

Controlling your device with AC Cloud Control app requires aforementioned Wi-Fi adaptors and working internet or Wi-Fi connection. Google Account required for use with Google devices. Features and services may change without notice. Google is a trademark of Google LLC.

Wi-Fi Solution

VOICE COMMAND CONTROL

Your MHI air conditioner can now be connected with any Alexa-enabled or Google Assistant voice control device. Turn your air conditioner on or off, change the operation mode or set the temperature using just your voice!



SMART DEVICE CONTROL

Turn your unit on or check the temperature while you’re out and about. Can’t remember if you turned your air conditioner off? Easily check and turn your unit off remotely using your smart device.



SMART HOME INTEGRATION

Tap into a universe of IFTTT (If This Then That) recipes and turn your MHI air conditioner into a smart air conditioner. IFTTT app allows to easily connect your air conditioner to 3rd party applications, services and devices including Gmail, Calendars, Weather, smartwatches plus thousands more, giving your unit advanced, smart functionality.

A living room with a white sofa and a wall-mounted air conditioner, illustrating smart home integration.

Set your air conditioner to turn on when you get close to home.

Set your air conditioner to turn on or off depending on the weather outside.

Set your air conditioner to turn on from the moment you wake up.

PRODUCT COMPATIBILITY

A compatible Wi-Fi adaptor is required to control your air conditioner via smart device or voice command technology. The Wi-Fi adaptor is sold separately and can be installed during the installation of your new MHI air conditioner or retrofitted to work with your existing MHI system. See below for product compatibility details.

MH-AC-WIFI-1 ADAPTOR	SYSTEM TYPE	COMPATIBLE PRODUCTS
	Wall Mounted	Avanti® series Avanti Plus® series Bronte® series
	Floor Standing	Wera™ series
	Bulkhead	Akari™ series

Features and Functions

	FUNCTION	DESCRIPTION	SRK-ZMP	AVANTI	AVANTI COOL ONLY	AVANTI PLUS	BRONTE	BRONTE COOL ONLY	WERA	AKARI
ENERGY SAVING	 Fuzzy Auto Mode	Uses algorithms to determine the best operating mode, temperature and automatically adjusts the inverter frequency.	●	●	●	●	●	●	●	●
	 Eco Operation (Avanti PLUS [®])	Automatically adjusts the set temperature based on the detected human activity and switches the unit off when no activity is detected.				●				
	 Eco Operation	The unit operates at a slightly reduced capacity to reduce power consumption while maintaining a comfortable room temperature.	●	●	●		●	●	●	●
AIRFLOW	 Jet Air Technology	Advanced fan blade technology, used in the development of jet engines, efficiently delivers a powerful yet quiet and evenly distributed airflow		●	●	●	●	●		
	 High Power Operation	Provides 15mins of boosted power to quickly heat or cool your home. Perfect for when you first turn on the unit.	●	●	●	●	●	●	●	●
	 3D Auto	Activates three independent motors which effectively and efficiently distributes an even airflow.		●	●	●	●	●		
	 Auto Louvre Mode	Depending on whether the unit is in heating or cooling mode this will automatically set the louvre at the optimum angle for even air distribution.	●	●	●	●	●	●	●	
	 Memory Louvre	Set the louvre at the desired angle. The unit will automatically return the louvres to this position on every subsequent start up.	●	●	●	●	●	●	●	
	 Up/Down Louvre Swing	The horizontal louvres will automatically swing up and down for even air distribution.	●	●	●	●	●	●	●	
	 Right/Left Louvre Swing	The vertical louvres will automatically swing left and right for even air distribution.		●	●	●	●	●	●	
	 Air Outlet Selection	Select whether the airflow is distributed via the upper outlet, the lower outlet or both.							●	
	 Positioning of Installation	Manually set the horizontal airflow direction to ensure even air distribution in situations where the indoor unit is installed in close proximity to a wall.		●	●	●	●	●		
	 Allergen Clear Operation	Multi-stage operation that activates filter enzymes, neutralising captured allergens such as pollen, dust and hair.		●		●	●			
	 Self-Clean Operation	Dries the indoor unit components by running the fan on ultra-low mode, preventing the growth of mould. Designed to be run regularly after use.	●	●	●	●	●	●	●	●
	 Photocatalytic Deodorizing Filter	Easy to clean filter that catches airborne particles before neutralising the odour causing molecules within them.		●	●	●	●	●	●	
CLEAN AIR	 Allergen Filter	Captures airborne allergens such as hair, pollen and dust particles before neutralising them and any bacteria using specially formulated enzymes.		●		●	●		●	
	 Removable Cover Panel	Removable front cover allowing access for easy cleaning and maintenance.	●	●	●	●	●	●	●	

Features and Functions

	FUNCTION	DESCRIPTION	SRK-ZMP	AVANTI	AVANTI COOL ONLY	AVANTI PLUS	BRONTE	BRONTE COOL ONLY	WERA	AKARI
COMFORT AND CONVENIENCE	 Dry Operation	Reduces humidity by removing moisture from the air without effecting the indoor temperature.	●	●	●	●	●	●	●	●
	 Silent Operation	Set periods of time where the unit will operate with reduced noise levels, perfect for night time and an uninterrupted sleep.		●	●	●	●	●	●	●
	 Night Setback	Designed for the colder seasons, this function ensures the room temperature is kept at around 10°C, even while unoccupied.		●		●	●		●	●
	 Comfort Start-up	When using the ON-TIMER function, the unit will switch on slightly earlier than the SET time, to ensure the optimum temperature is reached at the ON TIME.	●	●	●	●	●	●	●	●
	 Weekly Timer	Set up to 4 timer operations a day (max 28 per week). Once set, the unit will turn on and off at the specified times of the day repeatedly.		●	●	●	●	●	●	●
	 Sleep Timer	Set a pre-determined amount of time between 30 and 240 mins that your unit will operate for before switching off.	●	●	●	●	●	●	●	●
	 On/Off Timer	Set your unit to turn on and off once, at specific times, within a 24 hour period. Unit will then turn on and off at the specified times every day.	●	●	●	●	●	●	●	●
	 Preset Operation	The desired preset operation mode can be enabled with a single touch of a button.		●	●	●				
	 Child Lock	Lock the remote control to prevent little ones from changing functions and other settings. Useful for families with curious young children.		●	●	●	●	●	●	●
	 LED Brightness Adjustment	Adjust the brightness of the LED display on the indoor unit to minimise disturbance and ensure a good nights sleep.		●	●	●				
	 Motion Sensor	Automatically adjusts the set temperature based on human activity detected in the room. Switches the unit off when no activity is detected to save energy.				●				
	 Auto Operation	The unit will automatically select from heating, cooling or dry operation mode.	●	●	●	●	●	●	●	●
	 Microcomputer -Operated Defrosting	Automatically activated during low ambient temperatures to prevent the frosting of the outdoor heat exchanger.	●	●		●	●		●	●
	 Self-Diagnostic Function	In the unlikely event of a fault the internal microcomputer automatically runs a diagnostic of the system. This enables a service agent to quickly isolate and repair any issues.	●	●	●	●	●	●	●	●
	 Back-up Switch	If the remote control fails, the unit can be operated via an on/off switch on the indoor unit.	●	●	●	●	●	●	●	●
MAINTENANCE & PREVENTION FUNCTIONS	 Auto Restart Function	If there is a temporary loss of power, the unit will automatically restart in the same operating mode it was in when power is restored.	●	●	●	●	●	●	●	●

A man with glasses and a blue shirt is looking down at a laptop screen. A young child with blonde hair is sitting next to him, also looking at the screen. The background is a blurred indoor setting. A semi-transparent white rectangular box is overlaid on the left side of the image, containing the text 'ZONED ENERGY RATING LABELS' in a bold, dark blue, sans-serif font. The text is arranged in two lines: 'ZONED ENERGY' on the top line and 'RATING LABELS' on the bottom line. The overall image has a warm, soft-focus aesthetic.

ZONED ENERGY RATING LABELS

These new air conditioner labels provide more information including the difference in energy efficiency and estimated annual energy consumption of each model within these three zones.


- HOW MUCH COOLING AND HEATING POWER AN AIR CONDITIONER CAN PROVIDE*
- HOW EFFICIENT AN AIR CONDITIONER IS DEPENDING ON WHERE YOU LIVE
- AN ESTIMATE OF ELECTRICITY THE AIR CONDITIONER WILL USE, DEPENDING ON WHERE YOU LIVE
- HOW MUCH NOISE THE INDOOR AND OUTDOOR UNIT PRODUCE*

THIS TELLS YOU HOW MUCH COOLING POWER THE AIR CONDITIONER CAN PROVIDE

This example shows that if the temperature outside is hot (35°C) the system can provide 2.0kilowatts (kW) of cooling.

THIS TELLS YOU HOW MUCH HEATING POWER THE AIR CONDITIONER CAN PROVIDE

This example shows that if the temperature outside is cold (7°C) the system can provide 2.7 kilowatts (kW) of heating and if the temperature outside is very cold (2°C), then the appliance can provide 8.8kW of heating.

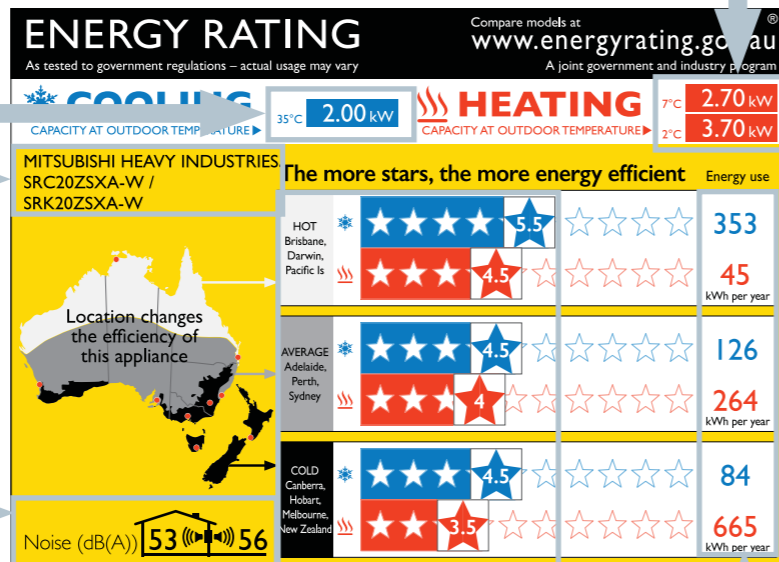

CAPACITY		2.0kW		2.5kW		2.5kW (Cool Only)		3.5kW		3.5kW (Cool Only)		5.0kW		5.0kW (Cool Only)							
Indoor		SRK20ZSA-W / DXK06ZSA-W	SRK25ZSA-W / DXK09ZSA-W	SRK10YSA-W	SRK10YSA-W	SRK35ZSA-W / DXK12ZSA-W	SRK13YSA-W	SRK50ZSA-W / DXK18ZSA-W													
Outdoor		SRC20ZSA-W / DXC06ZSA-W	SRC25ZSA-W / DXC09ZSA-W	SRC10YSA-W	SRC10YSA-W	SRC35ZSA-W / DXC12ZSA-W	SRC13YSA-W	SRC50ZSA-W / DXC18ZSA-W													
Power Source (Outdoor Unit)		1 Phase 240V 50Hz																			
*Operation Data	Nominal Capacity (Range)	Cooling T1	2.0 (0.9-3.0)	2.5 (0.9-3.5)	2.5 (0.9-3.5)	2.5 (0.9-3.5)	3.5 (0.9-4.4)	3.5 (0.9-4.4)	5.0 (1.2-5.5)	5.0 (1.2-5.5)											
		Heating H1	2.7 (1.0 -4.2)	3.2 (0.9-5.2)	3.95	N/A	N/A	N/A	N/A	5.8 (1.2-6.6)	5.8 (1.2-6.6)										
	Power Consumption	Cooling T1	0.41 (0.18-0.81)	0.51 (0.18-0.88)	0.51 (0.18-0.88)	0.51 (0.18-0.88)	0.82 (0.18-1.27)	0.82 (0.18-1.27)	1.39 (0.27-1.86)	1.39 (0.27-1.86)											
		Heating H1	0.56 (0.20-1.12)	0.65 (0.21-1.43)	N/A	N/A	1.65	1.65	1.49 (0.26-1.97)	1.49 (0.26-1.97)											
	Maximum Power Consumption			1.65	1.65	1.65	1.65	1.65	2.68	2.68											
*Operation Data	Running Current	Cooling T1	2.1	2.5	2.5	2.5	3.7	3.7	5.9	5.9											
		Heating H1	2.7	3.0	3.0	N/A	N/A	N/A	N/A	6.3	6.3										
	Inrush Current, Maximum Current		2.8, 9.0	3.2, 9.0	2.6, 9.0	2.6, 9.0	3.9, 9.0	3.9, 9.0	5.0, 14.5	5.0, 14.5											
		EER	4.88	4.90	4.90	4.90	4.27	4.27	3.60	3.60											
	COP		4.82	4.92	N/A	N/A	4.57	N/A	3.89	N/A											
Energy Label (GEMS 2019)	Sound Power Level (JIS C9612)	Cooling T1	56	58	58	58	62	62	61	61											
		Outdoor	35-27-22-19	40-31-22-19	40-31-22-19	39-31-22-19	43-34-27-19	43-34-27-19	43-36-28-22	43-36-28-22											
	Sound Pressure Level (JIS C9612)	Indoor	44	45	45	45	49	49	47	47											
		Cooling	★★★★ (4.5)	★★★★ (4.5)	★★★★ (4.5)	★★★★ (4.5)	★★★★ (4)	★★★★ (4)	★★★★ (3.5)	★★★★ (3.5)											
	Heating	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)	N/A	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)											
External dimensions (H×W×D)	Net weight	Indoor	290x870x230	290x870x230	290x870x230	290x870x230	290x870x230	290x870x230	290x870x230	290x870x230											
		Outdoor	540x780(+62)x290	540x780(+62)x290	540x780(+62)x290	540x780(+62)x290	540x780(+62)x290	540x780(+62)x290	540x780(+62)x290	640x800(+71)x290	640x800(+71)x290										
	Airflow	Indoor	9.5	10	10	10	10	10	10	10	10										
		Outdoor	33	36	36	33.5	33.5	33.5	33.5	43.5	43										
	Installation Data	Refrigerant (Type, Amount, Pre-charge Length)	Quantity	(R32) 0.58	(R32) 0.75	(R32) 0.75	(R32) 0.75	(R32) 0.75	(R32) 0.75	(R32) 1.05	(R32) 1.05										
Pre-Charged to Pipe			15	15	15	15	15	15	15	15	15										
Refrigerant Piping		Liquid line	Ø6.35	Ø6.35	Ø6.35	Ø6.35	Ø6.35	Ø6.35	Ø6.35	Ø6.35	Ø6.35										
		Gas line	Ø9.52	Ø9.52	Ø9.52	Ø9.52	Ø9.52	Ø9.52	Ø9.52	Ø12.7	Ø12.7										
Standard accessories		Connection Method	Flare connection																		
	Maximum Pipe Length (One Way)	20														25					
Optional parts	Max Vertical Height (Diff. Between O.U. and I.U.)	10 (O.U. above I.U.) / 10 (O.U. below I.U.)														15 (O.U. above I.U.) / 15 (O.U. below I.U.)					
	Enzyme filter & Photocatalytic Washable Deodorizing Filter	Enzyme filter & Photocatalytic Washable Deodorizing Filter														Enzyme filter & Photocatalytic Washable Deodorizing Filter					

Operation data has been gathered in accordance with AS/NZS 3823 standards. For testing conditions please refer to Page 23.

PRODUCT SPECIFICATIONS

AVANTI PLUS® SERIES

CAPACITY		2.0kW	2.5kW	3.5kW	5.0kW	6.0kW
Indoor		SRK20ZSXA-W	SRK25ZSXA-W	SRK35ZSXA-W	SRK50ZSXA-W	SRK60ZSXA-W
Outdoor		SRC20ZSXA-W	SRC25ZSXA-W	SRC35ZSXA-W	SRC50ZSXA-W	SRC60ZSXA-W
Power Source (Outdoor Unit)		1 Phase 240V 50Hz				
Energy Label (GEMS 2019)	Nominal Capacity (Range)	2.0 (0.9–3.4)	2.5 (0.9–3.8)	3.5 (0.9–4.5)	5.0 (1.0–6.2)	6.1 (1.0–6.9)
	Heating H1	2.7 (1.0–5.5)	3.2 (0.9–6.0)	4.3 (0.8–6.8)	6.0 (0.8–8.2)	6.8 (0.8–8.8)
	Heating H2	3.7	4.2	4.7	6.0	6.8
	Cooling T1	0.31 (0.18–0.76)	0.44 (0.16–0.91)	0.74 (0.16–1.27)	1.24 (0.19–1.90)	1.71 (0.19–2.50)
	Heating H1	0.47 (0.14–1.36)	0.59 (0.14–1.54)	0.90 (0.14–1.87)	1.36 (0.20–2.46)	1.65 (0.20–2.86)
*Operation Data	Maximum Power Consumption	1.92	1.92	1.92	2.9	2.9
	Running Current	1.7	2.3	3.4	5.2	7.2
Installation Data	Inrush Current, Maximum Current	2.4	2.9	4.1	5.7	6.9
	EER	2.5, 9.0	3.0, 9.0	4.3, 9.0	5.0, 15.0	5.0, 15.0
Airflow	COP	6.45	5.68	4.73	4.03	3.57
	Sound Power Level (JIS C9612)	5.74	5.42	4.78	4.41	4.12
External dimensions (HXWxD)	Sound Pressure Level (JIS C9612)	56	57	61	63	65
	Indoor	38-31-24-19	39-33-25-19	43-35-26-19	44-39-31-22	48-41-33-22
Net weight	Outdoor	43	44	48	51	52
	Cooling	★★★★ (5.5)	★★★★ (5)	★★★★ (5)	★★★★ (4)	★★★★ (3.5)
Energy Label (GEMS 2019)	Heating	★★★★★ (4.5)	★★★★★ (4.5)	★★★★★ (4)	★★★★★ (3.5)	★★★★★ (3.5)
	Cooling	★★★★★ (4.5)	★★★★★ (4.5)	★★★★★ (4)	★★★★★ (3.5)	★★★★★ (3)
	Average	★★★★★ (4)	★★★★★ (4.5)	★★★★★ (3.5)	★★★★★ (3)	★★★★★ (3)
	Cooling	★★★★★ (4)	★★★★★ (4)	★★★★★ (3.5)	★★★★★ (3)	★★★★★ (3)
	Heating	★★★★★ (4.5)	★★★★★ (4.5)	★★★★★ (4.5)	★★★★★ (3.5)	★★★★★ (3.5)
Installation Data	Connection Method	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3)	★★★★★ (2.5)	★★★★★ (2.5)
	Max Vertical Height (One Way)	305x920x220	305x920x220	305x920x220	305x920x220	305x920x220
Standard accessories	Refrigerant (Type, Amount, Pre-charge Length)	640x800(+71)x290	640x800(+71)x290	640x800(+71)x290	640x800(+71)x290	640x800(+71)x290
	Refrigerant Piping	13	13	13	13	13
Optional parts	Connection Method	43	43	43	45	45
	Max Vertical Height Diff. Between O.U. and I.U.	188-152-93-83	203-167-117-83	218-180-122-83	238-207-130-90	272-223-148-90
Demand Response (AS4755)	Refrigerant (Type, Amount, Pre-charge Length)	203-172-120-90	213-183-130-90	232-197-143-90	288-238-183-103	297-228-182-103
	Refrigerant Piping	(R32) 1.2	(R32) 1.2	(R32) 1.2	(R32) 1.3	(R32) 1.3
Standard accessories	Connection Method	15	15	15	15	15
	Max Vertical Height Diff. Between O.U. and I.U.	Ø6.35	Ø6.35	Ø6.35	Ø6.35	Ø6.35
Optional parts	Refrigerant (Type, Amount, Pre-charge Length)	Ø9.52	Ø9.52	Ø9.52	Ø12.7	Ø12.7
	Refrigerant Piping	Flare connection				
Demand Response (AS4755)	Connection Method	25				
	Max Vertical Height Diff. Between O.U. and I.U.	15 (O.U. above I.U.) / 15 (O.U. below I.U.)				
Standard accessories	Refrigerant (Type, Amount, Pre-charge Length)	20 (O.U. above I.U.) / 15 (O.U. below I.U.)				
	Refrigerant Piping	Allergen Clear & Photocatalytic Washable Deodorizing Filter				
Optional parts	Connection Method	Interface kit (SC-BIKN2-E) / Wi-Fi Kit				
	Max Vertical Height Diff. Between O.U. and I.U.	Yes				

* Operation data has been gathered in accordance with AS/NZS 3823 standards. For testing conditions please refer to Page 23.

PRODUCT SPECIFICATIONS

BRONTE® SERIES

CAPACITY		6.3kW	7.1kW	7.1kW (Cool Only)	8.0kW	9.5kW
Indoor		SRK63ZRA-W / DXK21ZRA-W	SRKT1ZRA-W / DXK24ZRA-W	SRK24YRA-W	SRK80ZRA-W / DXK28ZRA-W	SRK95ZRA-W / DXK33ZRA-W
Outdoor		SRC63ZRA-W / DXC21ZRA-W	SRC71ZRA-W / DXC24ZRA-W	SRC24YRA-W	SRC80ZRA-W / DXC28ZRA-W	SRC95ZRA-W / DXC33ZRA-W
Power Source (Outdoor Unit)		1 Phase 240V 50Hz				
Energy Label (GEMS 2019)	Nominal Capacity (Range)	6.3 (1.2–7.4)	7.1 (2.3–8.3)	7.1 (2.3–8.3)	8.0 (2.3–9.5)	9.5 (2.5–10.6)
	Heating H1	7.1 (0.8–9.2)	8.0 (2.0–10.9)	N/A	9.0 (2.1–11.2)	10.3 (3.2–11.9)
	Heating H2	7.0	8.1	N/A	8.2	9.6
	Cooling T1	1.58 (0.2–2.5)	1.84 (0.48–2.4)	1.84 (0.48–2.4)	2.22 (0.48–3.1)	2.56 (0.5–3.2)
	Heating H1	1.60 (0.16–2.8)	2.02 (0.4–3.4)	N/A	2.40 (0.40–3.40)	2.64 (0.6–3.7)
*Operation Data	Maximum Power Consumption	2.90	3.65	3.65	3.65	3.80
	Running Current	6.7	7.8	7.8	9.4	10.8
Installation Data	Inrush Current, Maximum Current	6.7	8.6	N/A	10.2	11.1
	EER	3.99	8.6, 17.0	7.8, 17.0	10.2, 17.0	11.1, 17.5
Airflow	COP	4.44	3.86	3.86	3.60	3.71
	Sound Power Level (JIS C9612)	64	65	N/A	3.75	3.90
External dimensions (HXWxD)	Sound Pressure Level (JIS C9612)	44-39-35-25	43-40-36-24	43-40-36-24	46-43-38-25	48-45-40-26
	Indoor	54	53	53	56	57
Energy Label (GEMS 2019)	Cooling	★★★★ (4)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)
	Heating	★★★★★ (3.5)	★★★★★ (3)	N/A	★★★★★ (3)	★★★★★ (3.5)
	Average	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3)	★★★★★ (3)
	Cooling	★★★★★ (3)	★★★★★ (2.5)	N/A	★★★★★ (2.5)	★★★★★ (2.5)
	Heating	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3.5)	★★★★★ (3.5)
Installation Data	Connection Method	★★★★★ (2.5)	★★★★★ (2)	N/A	★★★★★ (2)	★★★★★ (2)
	Max Vertical Height (One Way)	339x1197x262	339x1197x262	339x1197x262	339x1197x262	339x1197x262
Net weight	Outdoor	640x800(+71)x290	750x880(+88)x340	750x880(+88)x340	750x880(+88)x340	845x970(+89)x370
	Indoor	15.5	15.5	15.5	15.5	16.5
Airflow	Cooling	45	58	58	58	70.5
	Heating	342-301-262-173	342-310-270-174	342-310-270-174	383-345-300-182	408-355-293-173
Standard accessories	Refrigerant (Type, Amount, Pre-charge Length)	392-317-275-218	425-330-288-222	N/A	450-363-315-234	458-386-318-227
	Refrigerant Piping	(R32) 1.25	(R32) 1.6	(R32) 1.6	(R32) 1.6	(R32) 2.0
Optional parts	Connection Method	15	15	15	15	15
	Max Vertical Height Diff. Between O.U. and I.U.	Ø6.35	Ø6.35	Ø6.35	Ø6.35	Ø6.35
Demand Response (AS4755)	Refrigerant (Type, Amount, Pre-charge Length)	Ø12.70	Ø15.88	Ø15.88	Ø15.88	Ø15.88
	Refrigerant Piping	Flare connection				
Standard accessories	Connection Method	30				
	Max Vertical Height Diff. Between O.U. and I.U.	20 (O.U. above I.U.) / 20 (O.U. below I.U.)				
Optional parts	Refrigerant (Type, Amount, Pre-charge Length)	Allergen Clear & Photocatalytic Washable Deodorizing Filter				
	Refrigerant Piping	Enzyme filter & Photocatalytic Washable Deodorizing Filter				
Demand Response (AS4755)	Connection Method	Interface kit (SC-BIKN2-E) / Wi-Fi Kit				
	Max Vertical Height Diff. Between O.U. and I.U.	Yes				

* Operation data has been gathered in accordance with AS/NZS 3823 standards. For testing conditions please refer to Page 23.

PRODUCT SPECIFICATIONS

WERA™ SERIES

CAPACITY		2.5kW		3.5kW		5.0kW	
Indoor		SRF25ZSA-W		SRF35ZS-W		SRF50ZSX-W	
Outdoor		SRC25ZSA-W		SRC35ZSA-W		SRC50ZSXA-W	
Power Source (Outdoor Unit)				1 Phase 240V 50Hz			
*Operation Data	Nominal Capacity (Range)		2.5 (0.9~3.2)		3.5 (0.9~4.1)		5.0 (1.1~5.6)
	Heating H1		3.4 (0.9~4.7)		4.5 (0.9~5.2)		6.0 (0.8~7.4)
	Heating H2		3.45		3.80		5.60
	Power Consumption		0.52 (0.19~0.82)		0.82 (0.18~1.33)		1.32 (0.19~1.90)
	Heating H1		0.74 (0.23~1.20)		1.12 (0.19~1.53)		1.58 (0.19~2.34)
*Operation Data	Maximum Power Consumption		1.65		1.65		2.90
	Running Current		2.5		3.7		5.6
	Heating H1		3.4		4.9		6.6
	Inrush Current, Maximum Current		3.6, 9.0		5.0, 9.0		5.0, 15.0
	EER		5.00		4.27		3.79
Installation Data	COP		4.59		4.02		3.80
	Sound Power Level (JIS C9612)		60		63		63
	Sound Pressure Level (JIS C9612)		37~32-29-26		40-35-33-29		46-38-33-28
	Indoor		46		50		51
	Outdoor						
Energy Label (GEMS 2019)	Hot	Cooling	★★★★ (4)	★★★★ (4)	★★★★ (4)	★★★★ (3.5)	★★★★ (3.5)
		Heating	★★★ (3.5)	★★★ (3.5)	★★★ (3)	★★★ (3)	★★★ (3)
	Average	Cooling	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3)	★★★★ (3)
		Heating	★★★ (3)	★★★ (3)	★★★ (2.5)	★★★ (2.5)	★★★ (2.5)
	Cold	Cooling	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3.5)	★★★★ (3)	★★★★ (3)
External dimensions (HXWXD)	Heating		★★★ (2.5)	★★★ (2)	★★★ (2)	★★★ (2)	★★★ (2)
	Indoor		600x860x238		600x860x238		600x860x238
	Outdoor		540x780(+62)x290		540x780(+62)x290		640x800(+71)x290
	Indoor		18		19		19
	Outdoor						
Airflow	Outdoor		34.5		34.5		45
	Cooling (Indoor)		150-126-111-96		153-130-121-106		192-160-123-110
	Heating (Indoor)		175-136-128-110		178-138-135-123		200-167-157-127
	Quantity		(R32) 0.78		(R32) 0.78		(R32) 1.30
	Pre-Charged to		15		15		15
Installation Data	Liquid line		Ø6.35		Ø6.35		Ø6.35
	Gas line		Ø9.52		Ø9.52		Ø12.7
	Connection Method				Flare connection		
	Maximum Pipe Length (One Way)						
	Max Vertical Height Diff. Between O.U. and I.U.			20			30
Standard accessories		10 (O.U. above I.U.) / 10 (O.U. below I.U.)		Allergen Clear & Photocatalytic Washable Deodorizing Filter		20 (O.U. above I.U.) / 20 (O.U. below I.U.)	
Optional parts				Interface kit (SC-BIKN2-E) / Wi-Fi Kit			
Demand Response (AS4755)				Yes		Yes	

* Operation data has been gathered in accordance with AS/NZS 3823 standards. For testing conditions please refer to Page 23.

PRODUCT SPECIFICATIONS

SRK-ZMP SERIES

AKARI™ SERIES

CAPACITY		1.7kW	
Indoor		SRK17ZMP-S	
Outdoor		SRC17ZMP-S	
Power Source (Outdoor Unit)		1 Phase 240V 50Hz	
*Operation Data	Nominal Capacity (Range)	Cooling T1	1.7 (0.9~2.7)
		Heating H1	2.0 (0.8~3.8)
		Heating H2	3.1
	Power Consumption	Cooling T1	0.42 (0.25~0.94)
		Heating H1	0.47 (0.20~1.41)
*Operation Data	Maximum Power Consumption		1.43
	Running Current	Cooling T1	2.2
	Heating H1		2.5
	Inrush Current, Maximum Current		2.5, 9.0
	EER	Cooling T1	4.05
Energy Label (GEMS 2019)	Hot	Heating H1	4.30
		Outdoor	54
	Average	Indoor	45-34-23
		Outdoor	42
	Cold	Cooling	★★ (1.5)
External Dimensions (HXWXD)	Hot	Heating	★★★ (3)
		Cooling	★★ (1.5)
	Average	Heating	★★★ (2.5)
		Heating	★★ (1)
	Cold	Heating	★★★ (2.5)
Net weight	Indoor	262x769x210	
		540x645x275	
	Indoor	6.9	
	Outdoor	25	
Airflow	Cooling (Indoor)	168-122-70	
		158-122-87	
	Refrigerant (Type, Amount, Pre-charge Length)	(R410A) 0.655	
		Quantity	10
Installation Data	Refrigerant Piping	Pre-Charged to Pipe	m
		Liquid line	mm
	Connection Method	Gas line	mm
		Flare connection	
Standard accessories	Maximum Pipe Length (One Way)		15
	Max Vertical Height Diff. Between O.U. and I.U.		m
	10 (O.U. above I.U.) / 10 (O.U. below I.U.)		m
	Allergen Clear & Photocatalytic Washable Deodorizing Filter		
	Demand Response (AS4755)		No

Operation	Item	Indoor Air Temperature		Outdoor Air Temperature		Standards
		DB	WB	DB	WB	
Cooling		27°C	19°C	35°C	24°C	AS/NZ 3823.2
Heating		20°C	-	7°C	6°C	

- (1) The data is measured at the conditions mentioned in the table to the left.
- (2) The air conditioner is manufactured and tested in conformity with the AS/NZS.
- (3) Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
- (4) Select the breaker size according to applicable national standard.
- (5) The operation data indicates when the air-conditioner is operated at 240V 50Hz.

SUPERIOR TECHNOLOGY THAT **OUTLASTS AND OUTPERFORMS**

mhiaa.com.au

ABN 92 133 980 275

Australia:

Phone: **1300 138 007**

NSW & Head Office

Block E, 391 Park Road, Regents Park NSW 2143

Victoria

2/15 Howleys Road, Notting Hill VIC 3168

Brisbane

5/26 Flinders Parade, North Lakes QLD 4509

Townsville

1/37 Ross River Road, Mysterton QLD 4812

Western Australia

1/15-17 Capital Road, Malaga WA 6090

mhiheatpumps.co.nz

G.S.T. 105-673-620

New Zealand:

Phone: **0800 138 007**

Auckland

698A Great South Road, Penrose, 1061

Mitsubishi Heavy Industries Air conditioners Australia, Pty. Ltd.

MOVE THE WORLD FORWARD  **RD MITSUBISHI
HEAVY
INDUSTRIES
GROUP**